

Autonomic Cooperative Communications

N**Michał Wódczak***Samsung Electronics, Poland*

INTRODUCTION

Since the number of devices interconnected world-wide is growing at so unprecedented a pace, the orchestration of durable and resilient operation of networked systems becomes critically substantial. Especially when analysed in the context of network resiliency, such durability translates into the provision of key features of reliability, availability, safety, confidentiality, integrity, and maintainability. For this reason, it became highly valid to advocate for the integration of networking with the rationale behind autonomic computing in terms of self-configuration, self-optimisation, self-healing, and self-protection. This way the concept of Autonomic Cooperative Networking was proposed not only to integrate and capitalise on the above-mentioned building blocks, but, in particular, to incorporate the notion of Autonomic Cooperative Behaviour (Wódczak, 2014a). As such, stemming from and being triggered by the said Distributed Cooperative Relaying, the Autonomic Cooperative Behaviour intends to provide a mediation capability, not only aiming to facilitate cooperation among devices, but especially to integrate the relevant routines of the Optimised Link State Routing protocol. Consequently, the said devices are expected to share their computational capabilities and memory to perform joint data processing for the benefit of meeting the global performance indicators through increased resiliency.

As such, the paradigm of autonomic system design assumes that a networked system follow the operating principles of the Human Autonomic Nervous System and, thus, be able to self-manage without any external intervention. Yet, given the fact that autonomic designs are inherently char-

acterised by their own field of applicability, by no means should they be confused with the notion of autonomous or automated operation. In other words, while an autonomous development may, on the one hand, pertain to being stand-alone, and, on the other hand, to being cognitive, the concept of being automated is solely rooted in the operation of scripting. The difference in meaning does not exclude, however, certain dose of synergy so that autonomics could be supported through the inclusion of autonomous and automated routines. Following, to provide more details, the concept of Cooperative Relaying will be described on the basis of Virtual Antenna Arrays to pave the ground for the incorporation of Network Layer routines with special emphasis on the Optimised Link State Routing Protocol and its inherent Multi-Point Relay station selection heuristics. This way, such a routing enabled cooperation will be translated into Autonomic Cooperative Behaviour and integrated with the entities of the Generic Autonomic Network Architecture under the umbrella of Autonomic Cooperative Networked System design (Wódczak, 2014).

BACKGROUND

As the number of globally interconnected devices is becoming substantially large, the resulting networked systems are getting prone to configuration issues and resiliency becomes one of their key characteristics. Following the rationale behind self-management of autonomic computing, the main trend in networking nowadays is to put emphasis on the ability of a networked system to self-configure, self-optimize, self-heal, and self-protect without any explicit need for external

DOI: 10.4018/978-1-5225-2255-3.ch564

human intervention. This is crucial, for complexity reasons, as complete automation appears to be the only reasonable and justified way forward. In particular, devices may improve the related system robustness by sharing their computational resources through the application of cooperative schemes having been elevated to the level of Autonomic Cooperative Behaviour. For this reason the autonomic system design behind the Generic Autonomic Network Architecture was applied to synergise both the concept of Virtual Antenna Arrays and Multi-Point Relay station selection heuristics of the Optimised Link State Routing protocol, so that substantially large set-ups of devices could be considered to imitate the operation of Human Autonomic Nervous System. This was achieved with the aid of Autonomic Cooperative Networked System design allowing for the overall system to be controlled by Decision Making Entities within Autonomic Control Loops.

SYSTEM COMPONENTS


Cooperative Relaying

Cooperative relaying, also known as cooperative transmission, is undoubtedly one of the key advancements in the realm of mobile communications intended to facilitate the mitigation of the impairments induced and imposed by the characteristics of radio propagation (Pabst, Walke, Schultz, Herhold, Yanikomeroglu, Mukherjee, Viswanathan, Lott, Zirwas, Dohler, Aghvami, Falconer & Fettweis, 2004). Based on the assumption that Relay Nodes (RN) are to assist the process of transmission between the Source Node (SN) and the Destination Node (DN), this approach advocates that such a process be carried out in two phases. As outlined in Figure 1, during the first stage, both the DN and RN are assumed to receive the transmitted signal. Only after that may the RN additionally resend its copy towards the DN in order to, potentially, improve the transmission performance through the provision

of the so desirable diversity (Doppler, Redana, Wódczak, Rost & Wichman, 2009). In fact, there are a number of different variations of cooperative relaying known and this idea may also be referred to as cooperation diversity, cooperative diversity, or coded cooperation (Herhold, Zimmermann & Fettweis, 2004). In this work, however, the term of cooperative transmission is preferred as the most generic one (Wódczak, 2012).

Going further, based on the work described by (Laneman & Wornell, 2003) and according to the later classification given in (Herhold, Zimmermann & Fettweis, 2004), cooperative transmission schemes may be categorised either with regard to the forwarding strategy or protocol nature. Consequently, one may distinguish the amplify-and-forward, decode-and-forward, and decode-and-reencode categories. While the amplify-and-forward class is normally referred to as a non-regenerative approach, both its decode-and-forward and decode-and-reencode counterparts are typically named the regenerative ones (Herhold, Zimmermann & Fettweis, 2004). Additionally, the decode-and-reencode group may be subdivided even further to encompass fixed, adaptive, as well as feedback-based variations. One of the most comprehensive solutions of this type is known under the name of Virtual Antenna Arrays

Figure 1. Cooperative relaying

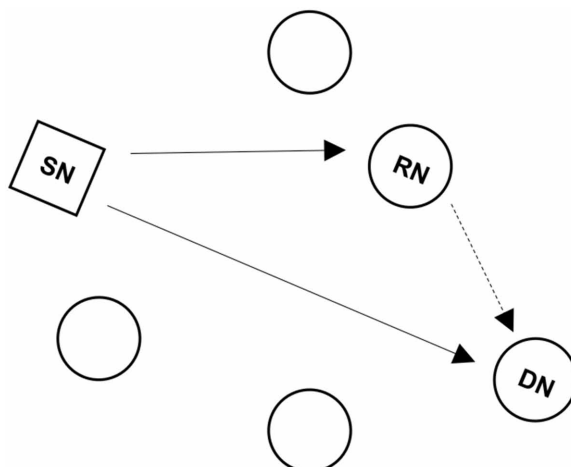

6 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:
www.igi-global.com/chapter/autonomic-cooperative-communications/184346

Related Content

Expanding Horizons: Juxtaposing Causal Mapping and Survey Techniques

Deborah J. Armstrong and V. K. Narayanan (2005). *Causal Mapping for Research in Information Technology* (pp. 174-194).

www.irma-international.org/chapter/expanding-horizons-juxtaposing-causal-mapping/6518

The WiMAX Network Solutions for Virtual Enterprises Business Network

Sebastian Marius Rosu, George Dragoi and Bujor Paveloiu (2015). *Encyclopedia of Information Science and Technology, Third Edition* (pp. 6327-6338).

www.irma-international.org/chapter/the-wimax-network-solutions-for-virtual-enterprises-business-network/113088

Massive Open Online Courses (MOOCs) and the Technologies That Support Learning with Them

Jeremy Rieland Kimberly A. Lawless (2015). *Encyclopedia of Information Science and Technology, Third Edition* (pp. 7529-7537).

www.irma-international.org/chapter/massive-open-online-courses-moocs-and-the-technologies-that-support-learning-with-them/112454

Challenges in Developing Adaptive Educational Hypermedia Systems

Eileen O'Donnell and Liam O'Donnell (2018). *Encyclopedia of Information Science and Technology, Fourth Edition* (pp. 2380-2391).

www.irma-international.org/chapter/challenges-in-developing-adaptive-educational-hypermedia-systems/183951

Design of Healthcare Lighting in Medical Centers Based on Power Carrier Communication

Yan Huang and Yongfeng Zhang (2023). *International Journal of Information Technologies and Systems Approach* (pp. 1-14).

www.irma-international.org/article/design-of-healthcare-lighting-in-medical-centers-based-on-power-carrier-communication/324748