

Chapter 84

Viterbi Decoder in Hardware

Mário Pereira Véstias
Instituto Politécnico de Lisboa, Portugal

ABSTRACT

Trellis decoding is used to recover encoded information that was corrupted during transmission over a noisy channel. The Viterbi algorithm is the most well-known trellis-based maximum likelihood decoding algorithm. The Viterbi algorithm is executed by a Viterbi decoder. Different hardware solutions may be considered to implement a Viterbi decoder with different design requirements in terms of area, performance, power consumption, among others. The most appropriate solution depends on the metric requirements of the application as well as on the target technology. Properties of the Viterbi algorithm are used to simplify and improve the architecture of the Viterbi decoder. In particular, statistical properties of the Viterbi algorithm are used to design parallel Viterbi decoders with very high data decoding rates. The chapter focuses on the implementation of a Viterbi decoder in hardware, including optimizations to improve the area and performance.

INTRODUCTION

Trellis decoding is used to recover encoded information that was corrupted during transmission over a noisy channel. The Viterbi algorithm is the most well known trellis-based maximum likelihood decoding algorithm. The Viterbi algorithm is executed by a Viterbi decoder. Different hardware solutions may be considered to implement a Viterbi decoder with different design requirements in terms of area, performance, power consumption, among others. The most appropriate solution depends on the metric requirements of the application as well as on the target technology.

Properties of the Viterbi algorithm are used to simplify and improve the architecture of the Viterbi decoder. In particular, statistical properties of the Viterbi algorithm are used to design parallel Viterbi decoders with very high data decoding rates.

The article focuses on the implementation of a Viterbi decoder in hardware, including optimizations to improve the area and performance.

DOI: 10.4018/978-1-5225-7598-6.ch084

BACKGROUND

Generically, a communication system includes a channel encoder at the transmitter and a channel decoder at the receiver. Encoding the bit stream to be transmitted reduces the energy per data bit needed to achieve the same bit error rate (BER) over a noisy channel compared to a non-coded transmission. A better channel code needs lower energy to obtain a particular BER.

Convolutional Encoder

Two major classes of binary codes are block codes and convolution codes. In this article we are only concerned with convolution codes (P. Elias, 1955). Convolution codes operate over a continuous bit stream. A convolutional encoder is used to generate the encoded bitstream. A typical implementation consists on a shift register and a set of modulo-2 addition. The content of the shift register defines the state of the encoder (s bits), from which we obtain a finite state machine with $m = 2^s$ states. Figure 1 shows an example of a convolution encoder with rate $1/2$ (rate $1/c$ generates c bits for each input bit) and its state machine.

An alternative way to represent the behavior of the encoder was proposed by Forney (G. D. Forney, Jr., 1967) designated *trellis representation*. A trellis is one of the most convenient ways to visualize the behavior of the decoding algorithms (see Figure 2).

Figure 1. Convolution encoder with rate $1/2$


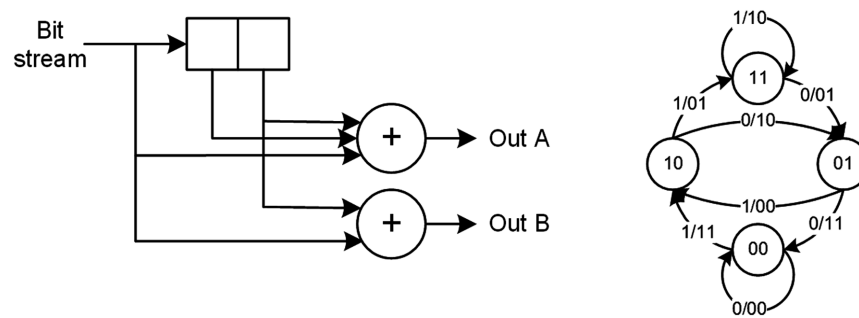


Figure 2. Trellis diagram of the encoder in Figure 1

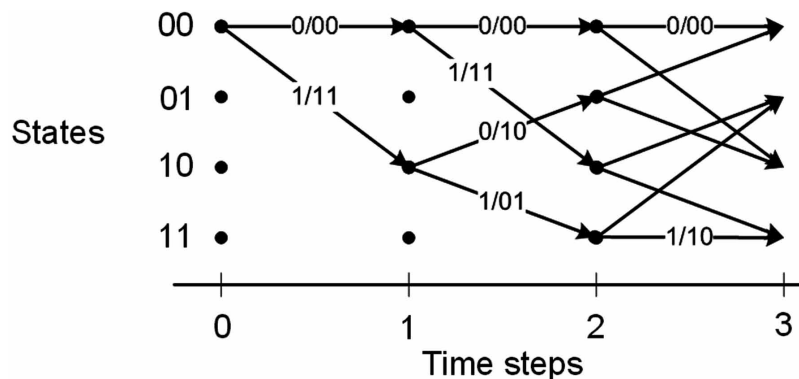

13 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:

www.igi-global.com/chapter/viterbi-decoder-in-hardware/214688

Related Content

XML-Based Languages for Multimodality in Mobile Environments

D. Avola (2007). *Encyclopedia of Mobile Computing and Commerce* (pp. 1050-1056).

www.irma-international.org/chapter/xml-based-languages-multimodality-mobile/17218

Location Tracking Prediction of Network Users Based on Online Learning Method With Python

Xin Xuand Hui Lu (2019). *International Journal of Mobile Computing and Multimedia Communications* (pp. 49-64).

www.irma-international.org/article/location-tracking-prediction-of-network-users-based-on-online-learning-method-with-python/220422

Advanced Mobile Lecture Viewing: Summarization and Two-Way Navigation

Ernesto Riveraand Akinori Nishihara (2012). *International Journal of Handheld Computing Research* (pp. 58-72).

www.irma-international.org/article/advanced-mobile-lecture-viewing/67097

Clique Size and Centrality Metrics for Analysis of Real-World Network Graphs

Natarajan Meghanathan (2019). *Advanced Methodologies and Technologies in Network Architecture, Mobile Computing, and Data Analytics* (pp. 1183-1198).

www.irma-international.org/chapter/clique-size-and-centrality-metrics-for-analysis-of-real-world-network-graphs/214692

Wireless-Enabled Fashion: Overall Supply Chain Impacts and Differentiating Technologies

L.F. Pau (2019). *International Journal of Mobile Devices, Wearable Technology, and Flexible Electronics* (pp. 37-56).

www.irma-international.org/article/wireless-enabled-fashion/268890