

Chapter 6

Autotrophic Denitrification Processes

Marisol Belmonte

*Pontificia Universidad Católica de Valparaíso-
Universidad de Playa Ancha, Chile*

Carmen Fajardo

*Universidad Autónoma Metropolitana-
Iztapalapa, Mexico*

Javiera Belén Toledo-Alarcón

*Institut National de la Recherche Agronomique,
France*

Daniel Valenzuela Heredia

University Adolfo Ibáñez, Chile

Lorena Jorquera

*Pontificia Universidad Católica de Valparaíso,
Chile*

Ramón Méndez

University of Santiago de Compostela, Spain

Estela Tapia-Venegas

*Pontificia Universidad Católica de Valparaíso,
Chile*

Gonzalo Ruiz-Filippi

*Pontificia Universidad Católica de Valparaíso,
Chile*

ABSTRACT

Effluents coming from anaerobic digesters are characterized by a COD/N ratio between 2 and 10, high ammonia NH_4^+ concentrations about 500 mg/L and a temperature range of 25-35 °C. To remove nitrogen from these effluents biological processes as the autotrophic denitrification with sulfur compounds, hydrogen or methane can be applied. The main goal of this chapter is to describe and evaluate the use of these processes from an economic point of view. The methanotrophic denitrification is the cheapest alternative to remove nitrate from effluents with low COD/N ratios.

INTRODUCTION

Anaerobic digestion is the process most utilized for organic matter removal in industrial wastewater with high Chemical Organic Demand/Nitrogen (COD/N) ratio (> 10 g/g), such as coming from marine products industries, livestock industry, agri-food industry, aquaculture, among others.

This process achieves relative high removal efficiency ($> 80\%$) of carbonaceous compounds of wastewater but has a low efficiency ($< 20\%$) regarding the nitrogen removal.


DOI: 10.4018/978-1-5225-1037-6.ch006

Effluents coming from anaerobic digesters are characterized by a COD/N ratio between 2 and 10 g/g, high ammonium (NH_4^+) concentrations (about 500 mg/L) and a temperature range of 25-35 °C. To remove nitrogen from these effluents, the biological processes based on the biogeochemical nitrogen cycle are the most commonly using. However, the application of this process depends on the COD/N ratio that is present in the wastewater (Campos *et al.*, 2010).

When the COD/N ratio of the wastewater is higher than 5, the combination of conventional nitrification (sequential NH_4^+ oxidation to nitrite (NO_2^-) and nitrate (NO_3^-)) and heterotrophic denitrification (nitrate or nitrite reduction to nitrogen gas (N_2)) processes are the most used as treatment (Ahn, 2006). While the COD/N ratio of the wastewater is lower than 5, the addition of an external carbon source is necessary to remove nitrogen by heterotrophic denitrification, being more expensive the treatment. Autotrophic denitrification is considered an advanced process to remove nitrogen in effluents with low COD/N ratio (Ahn, 2006) (Figure 1). This process is characterized by using inorganic compounds such as sulfur compounds, hydrogen (H_2) or methane (CH_4) (Equations 1, 2 and 3) as electron donors to remove nitrogen and inorganic carbon as a carbon source. Therefore, autotrophic denitrification could be an attractive and suitable alternative for the treatment of wastewater with low COD/N ratios as effluents coming from anaerobic digesters, in comparison with the heterotrophic denitrification.



Figure 1. Partial cycle of nitrogen: nitrification and denitrification

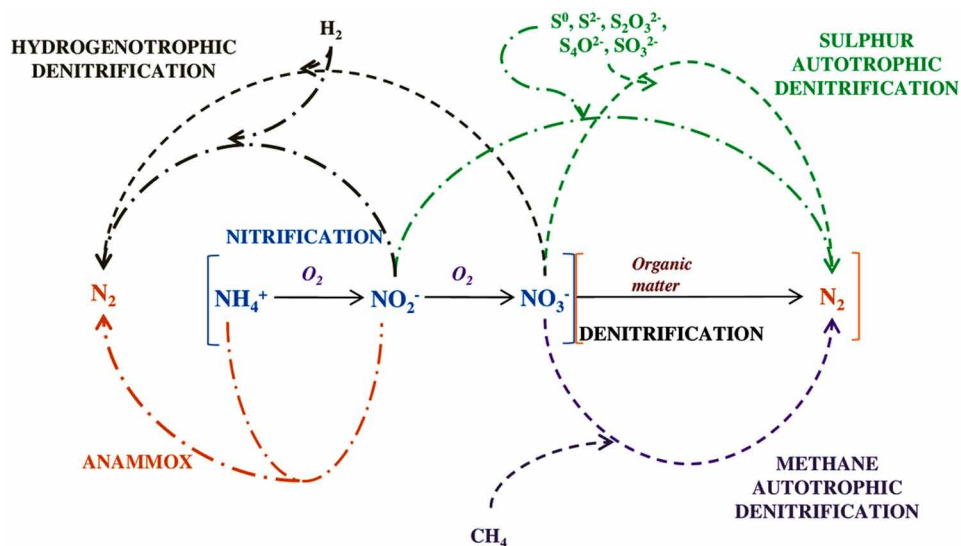

25 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:
www.igi-global.com/chapter/autotrophic-denitrification-processes/170023

Related Content

Combined Ferrite Treatment of Multi-Component Wastewaters

Gheorghe Duca, Olga Covaliova, Victor Covaliov, Lidia Romanciucand Ashok Vaseashta (2023).

Environmental and Technological Aspects of Redox Processes (pp. 238-252).

www.irma-international.org/chapter/combined-ferrite-treatment-of-multi-component-wastewaters/331058

Hydraulic Modeling of Oued El Jawaher Using HEC-RAS Model for Flood Protection

Himedi Maroua, Moumen Zineband Lahrach Abderahim (2020). *Decision Support Methods for Assessing Flood Risk and Vulnerability* (pp. 199-210).

www.irma-international.org/chapter/hydraulic-modeling-of-oued-el-jawaher-using-hec-ras-model-for-flood-protection/233463

Bio-Briquettes From Processed Cashew Nut Shell Waste: A Review

Gokul Raghavendra Srinivasan, Aditya Mahajan, Rajiv Sethand Rakesh Mahajan (2023). *Opportunities and Challenges in Climate-Friendly Clean Water and Energy Technologies* (pp. 271-296).

www.irma-international.org/chapter/bio-briquettes-from-processed-cashew-nut-shell-waste/322461

Water Allocation Assessment and Hydrological Simulation on Mukurumudzi River Basin in Kenya

Jacob Mutua Katuva, Christian Thine Omutoand John P. O. Obiero (2019). *Hydrology and Water Resources Management in Arid, Semi-Arid, and Tropical Regions* (pp. 85-104).

www.irma-international.org/chapter/water-allocation-assessment-and-hydrological-simulation-on-mukurumudzi-river-basin-in-kenya/230269

Tocols as Antioxidant Molecules in the Agro-Food Field

Giuseppe Ianiri, Alessandra Fratianni, Pasquale Avino, Caroline Vitone, Ashok Vaseashtaand Gianfranco Panfili (2023). *Environmental and Technological Aspects of Redox Processes* (pp. 106-118).

www.irma-international.org/chapter/tocols-as-antioxidant-molecules-in-the-agro-food-field/331050