

Carbon Capture From Natural Gas via Polymeric Membranes

E

Nayef Mohamed Ghasem
UAE University, UAE

Nihmiya Abdul Rahim
UAE University, UAE

Mohamed Al-Marzouqi
UAE University, UAE

INTRODUCTION

With the rapid development of technology, there is an increasing demand for fuels. Natural gas is an environmentally friendly, renewable, and clean energy source. It is also the third largest proportion in energy structure throughout the world after coal and oil. The composition of the raw natural gas extracted from producing wells depends on the type, depth, and location of the underground deposit and the geology of the area. Natural gas consists primarily of methane as the prevailing element but it also contains considerable amounts of light and heavier hydrocarbons as well as contaminating compounds of CO_2 , N_2 , Hg, He, H_2S and etc. The presence of acid gases such as CO_2 and H_2S can cause corrosion of pipeline and equipment and they present a major safety risk. Also they reduce the energy content of the gas and affect the selling price of the natural gas. Further in Liquefied Natural Gas (LNG) processing plant, while cooling the natural gas to a very low temperature, the CO_2 can be frozen and block pipeline systems and cause transportation drawback. Consequently, natural gas produced at the wellhead must be processed, i.e., cleaned, before it can be safely delivered to the high-pressure, long-distance pipelines that transport the product to the consuming public.

The traditional method for CO_2 separation is amine scrubbing. Although high product yields

and purities can be obtained, the disadvantage of this method is its high energy consumption, especially during stripper, in combination with high liquid losses due to evaporation of the solvent in the stripper (Naim et al., 2012). In addition, as liquid and gas streams cannot be controlled independently the occurrence of flooding, foaming, channeling and entrainment of the absorption liquid also limits the process. Membrane technology is a promising method to replace the conventional absorption technology. It has a high energy efficiency, is easy to scale-up because of its modular design and it has a high area-to-volume ratio. A limitation can be found in the permeability-selectivity tradeoff relation. Gas-liquid membrane contactor (GLMC) combines the advantages of membrane technology with those of absorption liquid (Ze et al., 2014). In a GLMC the microporous membrane acts as a fixed interface between the feed gas and the absorption liquid without dispersing one phase into another and this decoupling of the gas and liquid phase prevents any momentum transfer occurring across the phase boundary. As a consequence, the operation problems and constraints take place in conventional absorption technology can be resolved. Further the employment of microporous membrane elucidates the permeability-selectivity tradeoff relation drawback challenged in membrane technology. The performance of GLMC as CO_2 absorber and stripper depend upon several

DOI: 10.4018/978-1-5225-2255-3.ch266

factors such as type of membrane, type of absorption liquid, module configurations and process parameters. Understanding the optimistic attributes of these factors on CO_2 separation performance of GLMC is vital important to develop the GLMC that gives the outstanding CO_2 absorption/stripping performance. The focus of this work is to illustrate the potential for the energy efficient and effective separation of CO_2/CH_4 gas mixture via lean solvent and regenerating of the rich solvent through absorption/stripping mechanism taking place in a hollow fiber GLMC process.


BACKGROUND

GLMCs have attracted great interest over the past decade as CO_2 absorber and stripper. In the absorber, CO_2 diffuses from the feed gas through the porous membrane and is then absorbed in the flowing liquid. Then this CO_2 rich liquid circulated from the absorber to the stripper membrane contactor module in which stripped CO_2 will be carried by sweep gas (Figure 1).

In the GLMC, gas and liquid flow on the different side of the microporous membrane and membrane acts only as a barrier between two phases without dispersing one phase to another. In general, when hydrophobic microporous membranes are used in membrane contactors, the gas-liquid interface is immobilized at the opening of the pores of microporous membrane by careful control of the pressure difference between the two phases. For applications in gas-liquid absorption/desorption, the driving force is based on the concentration gradient. The gas molecules to be separated diffuse from the concentrated phase to the gas liquid interface via the membranes pores then contacts the diluted phase on the other side. For instance, in the case of CO_2/CH_4 separation, as shown in Figure 2, CO_2 molecules diffuses from the feed gas side through the membrane and is then absorbed in the selective absorption liquid.

In GLMC the mass transfer process consists three steps in series: the transfer from one phase to the membrane surface, transfer within membrane pores and transfer from other phase interface to the bulk. Figure 3 shows the concentration

Figure 1. Membrane gas absorption/stripper process

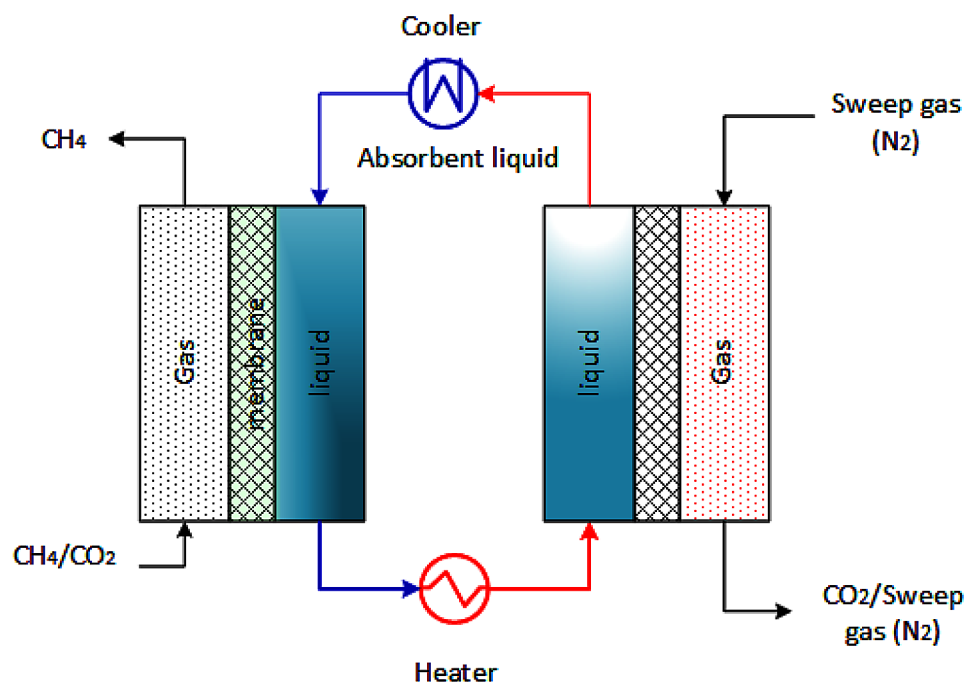

11 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:
www.igi-global.com/chapter/carbon-capture-from-natural-gas-via-polymeric-membranes/184017

Related Content

Learning From Imbalanced Data

Lincy Mathews and Seetha Hari (2018). *Encyclopedia of Information Science and Technology, Fourth Edition* (pp. 1825-1834).

www.irma-international.org/chapter/learning-from-imbalanced-data/183898

The Influence of Structure Heterogeneity on Resilience in Regional Innovation Networks

Chenguang Li, Jie Luo, Xinyu Wang and Guihuang Jiang (2024). *International Journal of Information Technologies and Systems Approach* (pp. 1-14).

www.irma-international.org/article/the-influence-of-structure-heterogeneity-on-resilience-in-regional-innovation-networks/342130

The Serious Games Applied for Health

Grassyara Tolentino, Alam Ventura, Lorena Cruz, Samuel Vidal, Ritielli Valeriano, Claudio Battaglini and Ricardo Jacó de Oliveira (2015). *Encyclopedia of Information Science and Technology, Third Edition* (pp. 5641-5650).

www.irma-international.org/chapter/the-serious-games-applied-for-health/113018

A Model Based on Data Envelopment Analysis for the Measurement of Productivity in the Software Factory

Pedro Castañeda and David Mauricio (2020). *International Journal of Information Technologies and Systems Approach* (pp. 1-26).

www.irma-international.org/article/a-model-based-on-data-envelopment-analysis-for-the-measurement-of-productivity-in-the-software-factory/252826

Mobile Commerce Use among UK Mobile Users Based on a Proposed Mobile Network Utilization Framework: An Experimental Approach – Part 2

Asem Moqbel, Mirella Yani-Di-Soriano and Shumaila Yousafzai (2012). *Knowledge and Technology Adoption, Diffusion, and Transfer: International Perspectives* (pp. 166-199).

www.irma-international.org/chapter/mobile-commerce-use-among-mobile/66943