

Chapter 5.20

User Based Call Admission Control Algorithms for Cellular Mobile Systems

Hamid Beigy

Sharif University of Technology, Iran

M. R. Meybodi

Amirkabir University of Technology, Iran

ABSTRACT

Call admission control in mobile cellular networks has become a high priority in network design research due to the rapid growth of popularity of wireless networks. Dozens of various call admission policies have been proposed for mobile cellular networks. This chapter proposes a classification of user based call admission policies in mobile cellular networks. The proposed classification not only provides a coherent framework for comparative studies of existing approaches, but also helps future researches and developments of new call admission policies.


1. INTRODUCTION

The frequency spectrum allocated to the mobile communication networks is very limited. This means that the frequency channels have to be reused as much as possible in order to support the many thousands of simultaneous calls that may arise in any typical mobile communication network (Katzela & Naghshineh, 1996). Thus,

the efficient management and sharing of channels among numerous users become an important issue. In cellular networks the geographical area covered by the network is divided into smaller regions called cells. Each cell is serviced by a base station, located at its center. The base station is used to service the users located at that cell. A number of base stations are again linked to a central server called mobile switching center, which also acts as a gateway of the mobile communication network to the existing wire-line networks such as PSTN,

DOI: 10.4018/978-1-61350-101-6.ch520

Figure 1. System model of cellular networks

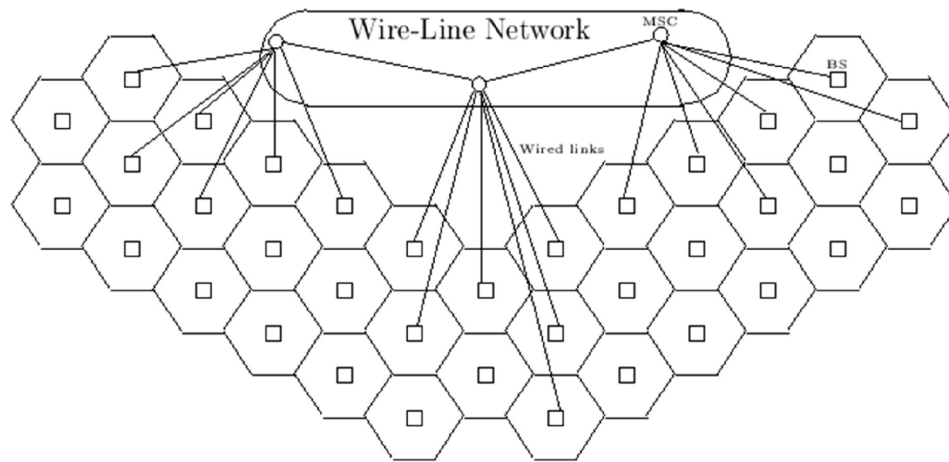

or internet. A base station communicates with users (mobile stations) through wireless links and with mobile switching centers through dedicated links. The model of such a network referred to as *cellular network* is shown in Figure 1 (Das & Sen & Jayaram, 1998).

We assume that the network uses a fixed channel assignment algorithm, which means that each base station has a fixed number of channels (capacity). This capacity is interpreted in terms of bandwidth and is independent of used multiple access technology such as FDMA, TDMA, or CDMA. In order for a mobile user to be able to communicate with other user(s), a connection usually must be established between the users. The establishment and maintenance of a connection in cellular networks is the responsibility of the base stations. In order to establish a connection, a mobile user must first specify its traffic characteristics and quality of service (QoS) requirements. This traffic specification may be either implicit or explicit depending on the type of services provided by the network. For example, in a cellular phone network, the traffic characteristics and QoS requirements of voice connections are known a priori to the base station, and therefore, they are usually specified implicitly in a connection request. The next generation wireless net-

works are expected to eventually carry multimedia traffic such as voice, mixed voice and data, image transmission, email and etc. The traffic characteristics and the QoS requirements of connections for these services may not be known a priori to the base station. In these networks, mobile users must specify explicitly the traffic characteristics and the QoS requirements as a part of the connection request. Then, the base station determines whether it can meet the requested QoS requirements and, if possible, establish a connection.

When a call is originated and attempted in a cell, one channel allocated to the base station is used for the communication between the mobile station and the base station as long as channel is available. When all channels in a cell are in use while a call is attempted, then it will be blocked and cleared from the system. When a call gets a channel, it will keep the channel until its completion, or until it moves out of the cell, in which case the used channel will be released. When the mobile station moves into a new cell while its call is ongoing, a new channel needs to be acquired in the new cell for further communication. This process is called *handoff* and must be transparent to the mobile user. During the handoff, if there is no channel is available in the new cell for the

31 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:

www.igi-global.com/chapter/user-based-call-admission-control/58852

Related Content

GAIA Bus: Cloud Computing Services for Agro-Food Chain

Georgios Kormentzas (2015). *International Journal of Wireless Networks and Broadband Technologies* (pp. 16-28).

www.irma-international.org/article/gaia-bus/125816

P2P Streaming over MANET and VANET

Nadia N. Qadriand Martin Fleury (2012). *Streaming Media with Peer-to-Peer Networks: Wireless Perspectives* (pp. 119-161).

www.irma-international.org/chapter/p2p-streaming-over-manet-vanet/66308

Taxonomy of Computer Network Congestion Control/Avoidance Methods

Mirza Waseem Hussain, Sanjay Jamwal, Tabasum Mirzaand Malik Mubasher Hassan (2021). *Managing Resources for Futuristic Wireless Networks* (pp. 178-212).

www.irma-international.org/chapter/taxonomy-of-computer-network-congestion-controlavoidance-methods/262552

Impact of Frame Duration and Modulation Coding Schemes With WiMAX Bandwidth Asymmetry in Transmission Control Protocol Variants

Kailash Chandra Bandhuand Ashok Bhansali (2019). *International Journal of Wireless Networks and Broadband Technologies* (pp. 35-45).

www.irma-international.org/article/impact-of-frame-duration-and-modulation-coding-schemes-with-wimax-bandwidth-asymmetry-in-transmission-control-protocol-variants/237190

QoS-Predictions Service: QoS Support for Proactive Mobile Services

Katarzyna Wac, Melanie Hilario, Bert-Jan van Beijnum, Richard Bultsand Dimitri Konstantas (2010). *Wireless Network Traffic and Quality of Service Support: Trends and Standards* (pp. 378-399).

www.irma-international.org/chapter/qos-predictions-service/42765