

Data Dissemination in Mobile Databases

Agustinus Borgy Waluyo

Monash University, Australia

Bala Srinivasan

Monash University, Australia

David Taniar

Monash University, Australia

INTRODUCTION

The development of wireless technology has led to *mobile computing*, a new era in data communication and processing (Barbara, 1999; Myers & Beigl, 2003). With this technology, people can now access information anytime and anywhere using a portable, wireless computer powered by battery (e.g., PDAs). These portable computers communicate with a central stationary server via a wireless channel. Mobile computing provides *database applications* with useful aspects of wireless technology known as mobile databases.

The main properties of mobile computing include mobility, severe power and storage restriction, frequency of disconnection that is much greater than a traditional network, bandwidth capacity, and asymmetric communications costs. Radio wireless transmission usually requires a greater amount of power as compared with the reception operation (Xu, Zheng, Zhu, & Lee, 2002). Moreover, the life expectancy of a battery (e.g., nickel-cadmium, lithium ion) was estimated to increase time of effective use by only another 15% (Paulson, 2003). Thus, efficient use of energy is definitely one of the main issues.

Data dissemination (can also be called *data broadcasting*) is one way to overcome these limitations. With this mechanism, a mobile client is able to retrieve information without wasting power to transmit a request to the server. Other characteristics of data dissemination include: scalability as it supports a large number of queries; query performance which is not affected by the number of users in a cell as well as the request rate; and effective to a high-degree of overlap in the user's request. In this article, the terms data dissemination and data broadcasting are used interchangeably.

The ultimate challenge in data dissemination is to minimize the *response time* and *tuning time* of retrieving database items. Response time is the total of elapsed time required for the data of interest to arrive in the channel and the download time, while tuning time is the amount of time that a client is required to listen to the channel, which is

used to indicate its energy consumption. In some cases, the response time is equal to the tuning time.

This article describes a state-of-the-art development in data dissemination strategies in mobile databases. Several strategies for improving the query performance by disseminating data to a population of mobile users will be explained.


BACKGROUND

In general, each mobile user communicates with a mobile base station (MBS) to carry out any activities such as a transaction and information retrieval. MBS has a wireless interface to establish communication with the mobile client, and it serves a large number of mobile users in a specific region called a "cell". The number of mobile clients in a cell can be infinite. In mobile environment architecture, each MBS is connected to a fixed network as illustrated in Figure 1.

Mobile clients can move between cells while being active and this intercell movement is known as the handoff process (Trivedi, Dharmaraja, & Ma, 2002). Each client in a cell can connect to the fixed network via wireless radio, wireless local area network (LAN), wireless cellular, or satellite. Each of the wireless networks provides a different bandwidth capacity. However, this wireless bandwidth is too small compared with the fixed network such as asynchronous transfer mode (ATM) that can provide a speed of up to 155Mbps (Elmasri & Navathe, 2003).

Data dissemination refers to the periodic broadcasting of database items to mobile clients through one or more wireless channels (or also called broadcast channels), and the clients filter their desired data on the fly. Access to data is sequential. The behavior of the broadcast channel is unidirectional which means the server disseminates a set of data periodically to a multiple number of users. This mechanism is also known as the *push-mechanism* (Malladi & Davis, 2002; Yajima, Hara, Tsukamoto, & Nishio, 2001). It must be noted that data dissemination is different from the data replication mecha-

Figure 1. Mobile environment architecture

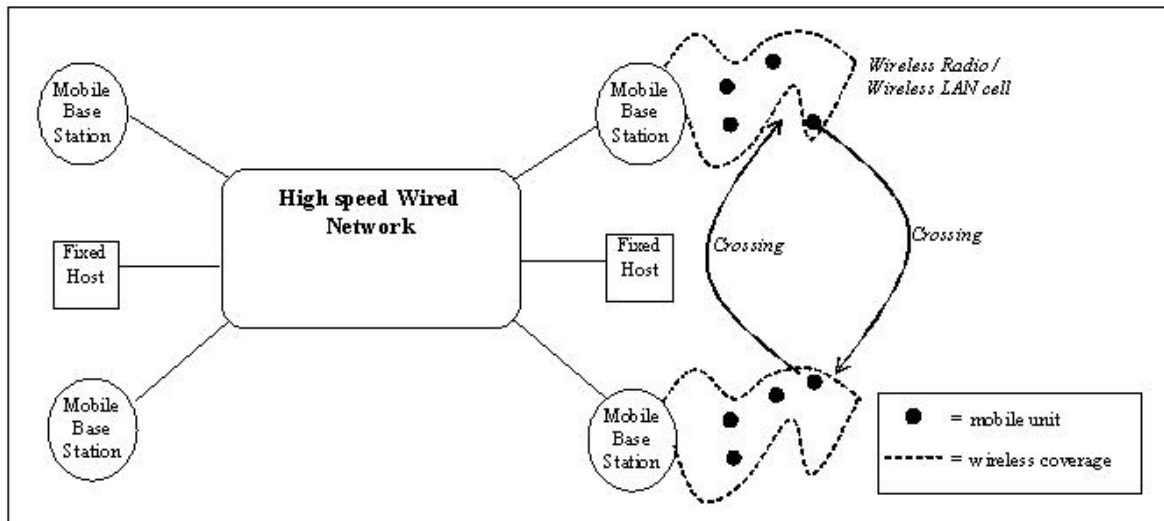

nism. Conventional data replication distributes a set of database items to one or more identified clients according to a pre-determined requirement. However, data dissemination broadcasts the database items periodically to an unbounded number of mobile clients, and the clients filter the data on air based on individual interest.

Figure 2 shows the mechanism of data dissemination. In this article, the term data item corresponds to database record or tuples, and data segment contains a set of data items. A complete broadcast file is referred to as a broadcast cycle. The terms mobile client, mobile computer, mobile unit, mobile user and client are used interchangeably.


DATA DISSEMINATION

Data dissemination schemes are classified into two categories: one is to minimize query response time, and the other minimizes tuning time.

Minimizing Query Response Time

There are several data dissemination schemes, which include:

Figure 2. Data dissemination mechanism

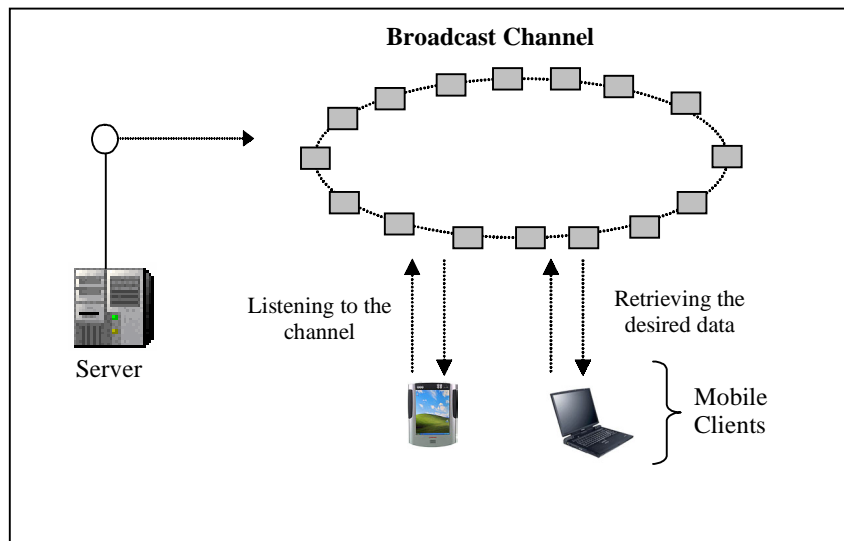

5 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:

www.igi-global.com/chapter/data-dissemination-mobile-databases/14320

Related Content

Challenges in M-Commerce

Pouwan Lei, Chris Chatwinand Rupert Young (2005). *Encyclopedia of Information Science and Technology, First Edition* (pp. 387-391).

www.irma-international.org/chapter/challenges-commerce/14267

Social Recommender System Based on CNN Incorporating Tagging and Contextual Features

Muhammad Alrashidi, Ali Selamat, Roliana Ibrahimand Hamido Fujita (2024). *Journal of Cases on Information Technology* (pp. 1-20).

www.irma-international.org/article/social-recommender-system-based-on-cnn-incorporating-tagging-and-contextual-features/335524

Optimal Crashing and Buffering of Stochastic Serial Projects

Dan Trietsch (2012). *Project Management Techniques and Innovations in Information Technology* (pp. 21-32).

www.irma-international.org/chapter/optimal-crashing-buffering-stochastic-serial/64952

Production, Publication, and Use of Educational Multimedia Content in Brazil: Challenges and Opportunities in Real World Technology Projects

Joni A. Amorim, Carlos Machado, Rosana G.S. Miskulinand Mauro S. Miskulin (2009). *Handbook of Research on Technology Project Management, Planning, and Operations* (pp. 406-418).

www.irma-international.org/chapter/production-publication-use-educational-multimedia/21647

Analysis of the Factors Affecting Sustainable Electronic Supply Chains in Healthcare Centers: An Interpretive-Structural Modeling Approach

Hossein Sayyadi Tooranloo, Salim Karimiand Khatereh Vaziri (2018). *Information Resources Management Journal* (pp. 23-43).

www.irma-international.org/article/analysis-of-the-factors-affecting-sustainable-electronic-supply-chains-in-healthcare-centers/212709