

Handheld Computing and J2ME for Internet-Enabled Mobile Handheld Devices

Wen-Chen Hu

University of North Dakota, USA

Jyh-haw Yeh

Boise State University, USA

I-Lung Kao

IBM, USA

Yapin Zhong

Shandong Institute of Physical Education and Sport, China

INTRODUCTION

Mobile commerce or m-commerce is defined as the exchange or buying and selling of commodities, services, or information on the Internet through the use of Internet-enabled mobile handheld devices (Hu, Lee, & Yeh, 2004). It is expected to be the next milestone after electronic commerce blossoming in the late-1990s. Internet-enabled mobile handheld devices are one of the core components of a mobile commerce system, making it possible for mobile users to directly interact with mobile commerce applications. Much of a mobile user's first impression of the application will be formed by his or her interaction with the device, therefore the success of mobile commerce applications is greatly dependent on how easy they are to use. However, programming for handheld devices is never an easy task not only because the programming languages and environments are significantly different from the traditional ones, but also because various languages and operating systems are used by handheld devices and none of them dominates.

This article gives a study of handheld computing, especially J2ME (Java 2 Platform, Micro Edition) programming, for mobile commerce. Various environments/languages are available for client-side handheld programming. Five of the most popular are (1) BREW, (2) J2ME, (3) Palm OS, (4) Symbian OS, and (v) Windows Mobile. They apply different approaches to accomplishing the development of mobile applications. Three themes of this article are:

1. Introduction of handheld computing, which includes server- and client- side computing.
2. Brief introductions of four kinds of client-side computing.
3. Detailed discussion of J2ME and J2ME programming.

Other important issues such as a handheld computing development cycle will also be discussed.

BACKGROUND

Handheld computing is a fairly new computing area and a formal definition of it is not found yet. Nevertheless, the authors define it as follows: Handheld computing is the programming for handheld devices such as smart cellular phones and PDAs (personal digital assistants). It consists of two kinds of programming: client- and server- side programming.

The definitions of client- and server- side computing are given as follows:

- **Client-Side Handheld Computing:** It is the programming for handheld devices and it does not need the support from server-side programs. Typical applications created by it include (1) address books, (2) video games, (3) note pads, and (4) to-do list.
- **Server-Side Handheld Computing:** It is the programming for wireless mobile handheld devices and it needs the support from server-side programs. Typical applications created by it include (1) instant messages, (2) mobile Web contents, (3) online video games, and (4) wireless telephony.

This article will focus on the client-side computing. The server-side computing is briefly given next.


Server-Side Handheld Computing

Most applications created by this kind of programming, such as instant messaging, require network programming such as TCP/IP programming, which will not be covered in this chapter. The most popular application of server-side handheld computing is database-driven mobile Web sites, whose structure is shown in Figure 1. A database-driven

Table 1. A comparison among five handheld-computing languages/environments

	BREW	J2ME	Palm OS	Symbian OS	Windows Mobile
Creator	Qualcomm Inc.	Sun Microsystems Inc.	PalmSource Inc.	Symbian Ltd.	Microsoft Corp.
Language/Environment	Environment	Language	Environment	Environment	Environment
Market Share (PDA) as of 2004	N/A	N/A	2 nd	N/A	1 st
Market Share (Smartphone) as of 2005	?	N/A	3 rd	1 st	2 nd
Primary Host Language	C/C++	Java	C/C++	C/C++	C/C++
Target Devices	Phones	PDAs & phones	PDAs	Phones	PDAs & phones

Figure 1. A generalized system structure of a database-driven mobile Web site

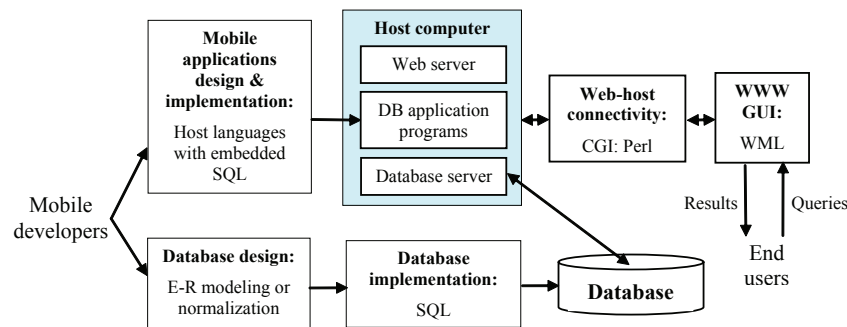

mobile Web site is often implemented by using a three-tiered client/server architecture consisting of three layers:

1. **User Interface:** It runs on a handheld device (the client) and uses a standard graphical user interface (GUI).
2. **Functional Module:** This level actually processes data. It may consist of one or more separate modules running on a workstation or application server. This tier may be multi-tiered itself.
3. **Database Management System (DBMS):** A DBMS on a host computer stores the data required by the middle tier.

The three-tier design has many advantages over traditional two- or single- tier design, the chief one being: the added modularity makes it easier to modify or replace one tier without affecting the other tiers.

CLIENT-SIDE HANDHELD COMPUTING

Various environments/languages are available for client-side handheld programming. Five of the most popular are (1) BREW, (2) J2ME, (3) Palm OS, (4) Symbian OS, and (5) Windows Mobile. They apply different approaches to accomplishing the development of mobile applications. Figure 2 shows a generalized development cycle applied by them and Table 1 gives the comparison among the five languages/environments. The second half of this article is devoted to J2ME details and brief introductions of the other four are given in this section.

BREW (Binary Runtime Environment for Wireless)

BREW is an application development platform created by Qualcomm Inc. for CDMA-based mobile phones (Qualcomm Inc., 2003). CDMA is a digital wireless telephony transmission technique and its standards used for 2G mobile

6 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage: www.igi-global.com/chapter/handheld-computing-j2me-internet-enabled/17093

Related Content

Digital Learning Technologies: Subjective and Objective Effectiveness Evaluation in Higher Education Settings

Ziad Hunaiti (2017). *International Journal of Handheld Computing Research* (pp. 41-50).

www.irma-international.org/article/digital-learning-technologies/187200

Analysis and Linkage of Data from Patient-Controlled Self-Monitoring Devices and Personal Health Records

Chris Paton (2014). *Social Media and Mobile Technologies for Healthcare* (pp. 227-236).

www.irma-international.org/chapter/analysis-and-linkage-of-data-from-patient-controlled-self-monitoring-devices-and-personal-health-records/111587

Modeling Fault Tolerant and Secure Mobile Agent Execution in Distributed Systems

H. Hamidi and K. Mohammadi (2009). *Mobile Computing: Concepts, Methodologies, Tools, and Applications* (pp. 2739-2751).

www.irma-international.org/chapter/modeling-fault-tolerant-secure-mobile/26689

Context-Aware and Adaptive Units of Learning in mLearning

Sergio Gómez and Ramón Fabregat (2012). *International Journal of Handheld Computing Research* (pp. 1-25).

www.irma-international.org/article/context-aware-adaptive-units-learning/67094

Experimental Validation of Distributed Cooperative Control of Multiple Mobile Robots via Local Information Exchange

Gregory A. Bock, Ryan T. Hendrickson, Jared Allen Lamkin, Brittany Dhall, Jing Wang and In Soo Ahn (2017). *International Journal of Handheld Computing Research* (pp. 19-40).

www.irma-international.org/article/experimental-validation-of-distributed-cooperative-control-of-multiple-mobile-robots-via-local-information-exchange/187199