

Chapter 6

A Test–Driven Approach to Behavioral Queries for Service Selection

Laura Zavala

Medgar Evers College of the City University of New York, USA

Benito Mendoza

New York City College of Technology, USA

Michael N. Huhns

University of South Carolina, USA

ABSTRACT

Although the areas of Service-Oriented Computing (SOC) and Agile and Lean Software Development (LSD) have been evolving separately in the last few years, they share several commonalities. Both are intended to exploit reusability and exhibit adaptability. SOC in particular aims to facilitate the widespread and diverse use of small, loosely coupled units of functionality, called services. Such services have a decided agility advantage, because they allow for changing a service provider at runtime without affecting any of a group of diverse and possibly anonymous consumers. Moreover, they can be composed at both development-time and run-time to produce new functionalities. Automatic service discovery and selection are key aspects for composing services dynamically. Current approaches attempting to automate discovery and selection make use of only structural and functional aspects of the services, and in many situations, this does not suffice to discriminate between functionally similar but disparate services. Service behavior is difficult to specify prior to service execution and instead is better described based on experience with the execution of the service. In this chapter, the authors present a behavioral approach to service selection and runtime adaptation that, inspired by agile software development techniques, is based on behavioral queries specified as test cases. Behavior is evaluated through the analysis of execution values of functional and non-functional parameters. In addition to behavioral selection, the authors' approach allows for real-time evaluation of non-functional quality-of-service parameters, such as response time, availability, and latency.

DOI: 10.4018/978-1-4666-2503-7.ch006

INTRODUCTION


A methodology for software development based on services as fundamental building blocks, known as service-oriented computing, has become widely used in building enterprise systems, because it greatly enhances their flexibility and adaptability. As a further incentive for this methodology, the number of publicly available services is continuing to increase and the Internet is becoming an open repository of such atomic heterogeneous software components. Multiple services can be integrated to facilitate cooperation between various business parties, achieve agility of the business integration, and even provide value-added services for service consumers. Essential to these capabilities is the detection of entities, services, and other resources that can be used for satisfying a specification of desired functionality. The precision of the selection process improves the possibility of having services that find, connect, and communicate with one another automatically, sharing information and performing tasks without human intervention.

Web services are the current most promising instantiation of the service-oriented methodology. Web services comprise infrastructure for

describing service structure, via WSDL (Christensen, Curbera, Meredith, & Weerawarana, 2001); specifying semantics and functionality via WSDL-S (Akkiraju et al., 2005), OWL-S (Martin et al., 2004), and WSMO (Roman et al., 2006)); supporting a service repository, via UDDI (Clement et al., 2004) or some less structured registry; interacting with services, via SOAP (Gudgin et al., 2007); and scheduling and orchestrating, via WSCL (Banerji et al., 2002) (Barry, 2003; Wombacher, Fankhauser, & Mahleko, 2004). The relationships among these components are depicted in Figure 1.

There are three orthogonal dimensions for describing a service at the knowledge level (Table 1): (1) structure, (2) function, and (3) behavior. Current approaches for automating discovery and selection of services make use of only the first two. Syntactic and semantic search based on keywords on the structural definition of the service, usually the WSDL content, are used for service discovery in repositories. Semantic descriptions of service inputs and outputs are used for the selection of services. WSDL-S, OWL-S, and WSMO are the most significant standards for such semantic descriptions.

Figure 1. The general architectural model for Web services

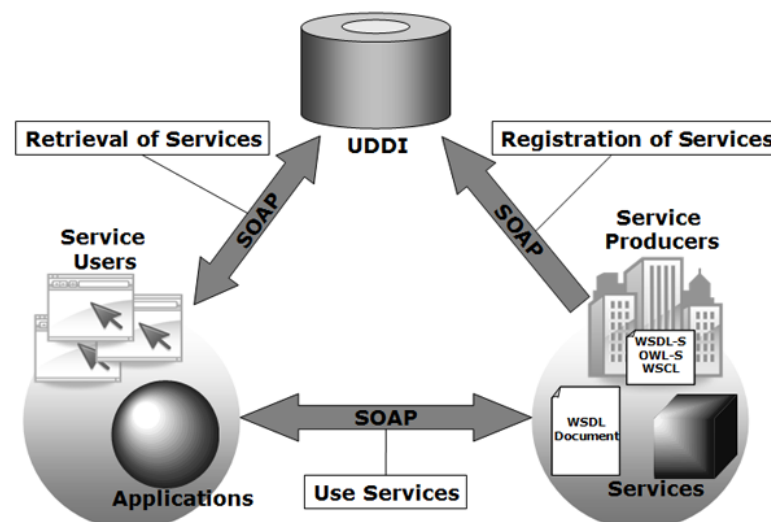

16 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:

www.igi-global.com/chapter/test-driven-approach-behavioral-queries/70732

Related Content

Introduction to SDN and NFV

Himanshu Sahu and Misha Hungyo (2018). *Innovations in Software-Defined Networking and Network Functions Virtualization* (pp. 1-25).

www.irma-international.org/chapter/introduction-to-sdn-and-nfv/198191

Predicting Software Abnormal State by using Classification Algorithm

Yongquan Yan and Ping Guo (2021). *Research Anthology on Recent Trends, Tools, and Implications of Computer Programming* (pp. 1095-1113).

www.irma-international.org/chapter/predicting-software-abnormal-state-by-using-classification-algorithm/261070

Stem Cell-Based Personalized Medicine: From Disease Modeling to Clinical Applications

Alessandro Prigione (2012). *Computer Engineering: Concepts, Methodologies, Tools and Applications* (pp. 1855-1866).

www.irma-international.org/chapter/stem-cell-based-personalized-medicine/62549

Wireless Sensor and Actuator Networks-Based Reliable Data Acquisition Mechanism

Anil Sharma, Dankan Gowda V., A. Yasmine Begum, D. Nageswari and S. Lokesh (2023). *Energy Systems Design for Low-Power Computing* (pp. 187-213).

www.irma-international.org/chapter/wireless-sensor-and-actuator-networks-based-reliable-data-acquisition-mechanism/319996

Sentiment Analysis: Using Artificial Neural Fuzzy Inference System

Syed Muzamil Basha and Dharmendra Singh Rajput (2018). *Handbook of Research on Pattern Engineering System Development for Big Data Analytics* (pp. 130-152).

www.irma-international.org/chapter/sentiment-analysis/202838