

Infinite Petri Nets as Models of Grids

A

Dmitry A. Zaitsev

International Humanitarian University, Ukraine

Ivan D. Zaitsev

Ershov Institute of Informatics Systems, Russia

Tatiana R. Shmeleva

Odessa National Academy of Telecommunications, Ukraine

INTRODUCTION

The present article represents an overview of works where basic methods of infinite Petri nets investigation were presented; moreover, it reveals directions of prospective future research. Peculiar practical concern represents the result on deadlocks disclosure within mentioned structures, their classification and revealing possibilities of the network blocking via ill-intended traffic of special form.

The research technique was described in detail and approved on a series of tasks (Zaitsev, 2013; Zaitsev & Shmeleva, 2010; Shmeleva, Zaitsev, & Zaitsev, 2009; Zaitsev & Shmeleva, 2008; Shmeleva, 2007); the obtained theoretic results were formulated as theorems for definite structures.

BACKGROUND

Components, used for composition of infinite structures, are functional subnets (clans) of Petri nets (Zaitsev, 2006; Zaitsev, 2005) which are well studied when investigating usual (finite) models, for instance, in the process of protocol TCP verification. Input places of a clan have only outgoing arcs and output place – only incoming arcs. Composition of protocol TCP model from its clans is represented in Figure 1.

Compositional analysis allowed speed-up of the verification processes of complex networking protocols because of solving a sequence of linear systems with lesser dimension which is essential when finding solutions in nonnegative domain (monoid) for Diophantine systems (ring).

ISSUES, CONTROVERSIES, PROBLEMS


The first problem which researchers encountered, when verifying networking protocols via Petri nets, was the problem of exponential computation complexity of the majority known analysis methods.

To solve this problem, the compositional analysis of Petri nets (Zaitsev, 2006; Zaitsev, 2005) was offered based on the decomposition of a net into the set of its functional subnets (clans), solving tasks for each clan and then fulfilling, either simultaneously or sequentially, composition of functional subnets. Solving a few systems with considerably lesser dimension, under the condition of exponential complexity, allowed an exponential speed-up of computations and verification of known protocols, such as ECMA, BGP, TCP, and IOTP, in reasonable time.

The second problem arose when investigating protocols of the network Ethernet with common bus architecture. It was rather simple to construct a model of a single device. The majority of protocols stipulates interaction of two systems, for example, as protocol TCP. Electronic commerce protocol IOTP considers a few interacting systems but their number is constant: Customer, Merchant, Payment Handler, Delivery Handler, Merchant Customer Care Provider. A segment of Ethernet with common bus architecture could contain a priori unknown number of computers which is reasonable to not limit in research in spite of definite physical limitations stated in standards.

To solve this problem, infinite Petri nets with regular structure were introduced for the first time as a linear composition of the workstation models. The further

Figure 1. Composition of protocol TCP model

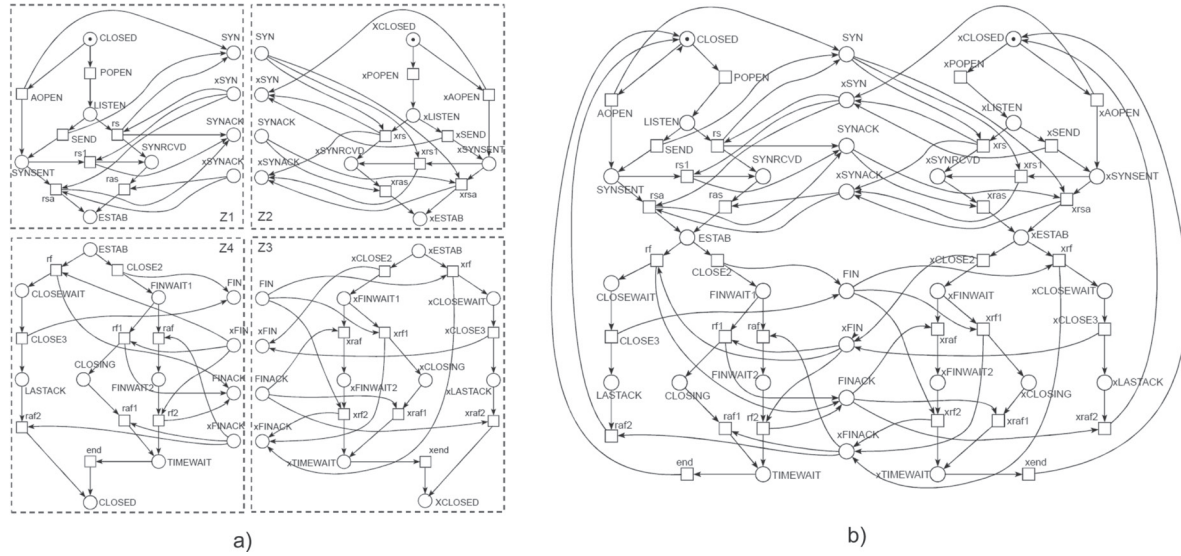

progress of research was indicated by the number of dimensions and the structure of devices' connections: tree-like structures for analysis of switched Ethernet (Shmeleva, 2007), triangular, rectangular, and hexangular grids for analysis of distributed computations, radio and television broadcasting, cellular communications (Zaitsev, 2013; Shmeleva, Zaitsev & Zaitsev, 2009) as well as various edge conditions. In the most general form, results were obtained for a hypercube with an arbitrary size and an arbitrary number of dimensions (Zaitsev & Shmeleva, 2010; Zaitsev & Shmeleva, 2008).


BASIC NOTIONS AND DEFINITIONS

Petri net (PN) is a bipartite directed graph on which a discrete dynamic process is defined. The first part of vertices, named places, is depicted by circles; the second part of vertices, named transitions, is depicted by bars (rectangles); dynamic elements, named tokens,

are depicted by dots situated inside places. Tokens are consumed and produced by transitions as result of their firing. A transition is fireable if each its input place contains at least a token. The behavior of a net is a step-by-step process; on each step, an arbitrary fireable transition fires. When firing, a transition consumes a token from each its input place and puts a token into each its output place. In Figure 2, an example of the transition firing is shown and also a graph of reachable markings (GRM) of Petri net which is a complete formal description of its behavior. In general case GRM is infinite which requires developing special methods of Petri net analysis.

A Petri net occupies a unique position within hierarchy of discrete systems: it is more powerful than a finite automaton and less powerful than a Turing machine. Thus, it provides facilities of the systems' behavior specification inaccessible in the formalism of finite automata and, besides, a series of the systems' properties analysis tasks are algorithmically solvable problem, in contrast to Turing machines.

Figure 2. Behavior of a Petri net

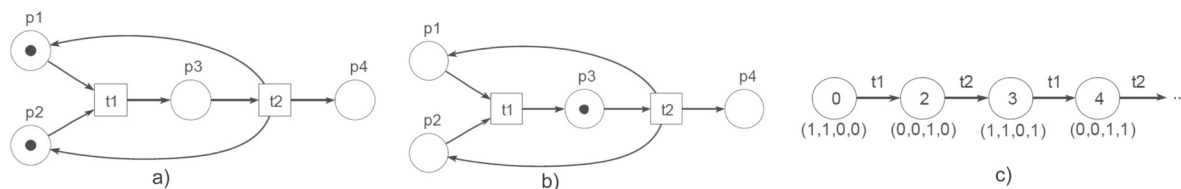

16 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:
www.igi-global.com/chapter/infinite-petri-nets-as-models-of-grids/112328

Related Content

Mission, Tools, and Ongoing Developments in the So.Re.Com. "A.S. de Rosa" @-library

Annamaria Silvana de Rosa (2018). *Encyclopedia of Information Science and Technology, Fourth Edition* (pp. 5237-5251).

www.irma-international.org/chapter/mission-tools-and-ongoing-developments-in-the-sorecom-as-de-rosa--library/184228

An Efficient Image Retrieval Based on Fusion of Fast Features and Query Image Classification

Vibhav Prakash Singh, Subodh Srivastava and Rajeev Srivastava (2017). *International Journal of Rough Sets and Data Analysis* (pp. 19-37).

www.irma-international.org/article/an-efficient-image-retrieval-based-on-fusion-of-fast-features-and-query-image-classification/169172

The Systems View of Information Systems from Professor Steven Alter

David Paradise (2008). *International Journal of Information Technologies and Systems Approach* (pp. 91-98).

www.irma-international.org/article/systems-view-information-systems-professor/2541

Rigor, Relevance and Research Paradigms: A Practitioner's Perspective

John C. Beachboard (2004). *The Handbook of Information Systems Research* (pp. 117-132).

www.irma-international.org/chapter/rigor-relevance-research-paradigms/30346

Reasoning on vague ontologies using rough set theory

(). *International Journal of Rough Sets and Data Analysis* (pp. 0-0).

www.irma-international.org/article/288522