

Solutions for Wireless City Networks in Finland

Tommi Inkinen

University of Helsinki, Finland

Jussi S. Jauhiainen

University of Oulu, Finland

INTRODUCTION

Wireless urban networks can be approached from many perspectives. They are commonly studied on the basis of technology development (e.g., Chao, Uden, & Shih, 2005), business and service support (e.g., Friday, Davies, Wallbank, Catterall, & Pink, 2004; Jenisch, Orlamünder, Köstring, & Brügge, 2005), urban marketing and city image promotion (e.g., Dobers, 2004) or societal use of technology (e.g., Graham & Marvin, 1996; Rao & Parikh, 2003; Palm & Wihlborg, 2006).

This article gives a detailed outline of the provision and condition of public wireless local area networks (WLANs) in Finland. The cases of Oulu, Turku and Helsinki (“Arabianranta” residential area) are presented. These cities are relevant study locations because they have actively participated to the creation processes of public city WLANs. They are also using wireless networks as promotion tools in their image marketing. In addition, Finland has been regarded as one of the top “network ready” nations in the world and was ranked fourth in the latest Networked Readiness Index by WEF (2007) after Denmark, Sweden and Singapore.

BACKGROUND

Several relevant studies on wireless networks have been conducted recently (e.g., Harwit, 2005; Salkintzis, Pavlidou, Fitzek, & Varma, 2005; Zhuang, Gan, Loh, & Chua, 2003). For example, Tang and Baker (2002) analysed metropolitan area wireless networks in three locations in the U.S., including the San Francisco Bay Area, Washington D.C. and Seattle. They provided an extensive quantified analysis of network loading, activity and mobility patterns of data signals.

To generalise the work of Tang and Baker (2002), there are variations in 1) technologies, 2) organisational arrangements and 3) usage preferences related to WLANs. There are several “city networks” that could be studied here. First, several technical solutions exist for different purposes. Private radio access networks (RANs) and cellular wide area networks (WANs) are often deployed by public authorities

(e.g., emergency units, police, maintenance) for the purpose of sharing and delivering information from their daily field operations. WLANs are the third typical solution structure for providing a higher bandwidth in outdoor conditions. WLANs are based on standardised industry technologies. Three main standards are used to define the communication protocol between the access point and the client. They are all variants of the IEEE 802.11 standard (802.11a, 802.11b and 802.11g). The (a) and (g) standards provide 54 Mbps rates and the (b) standard, 11 Mbps. However, in practice, the rates are considerably lower because of protocol overheads and distance decay between the client and the access device (Cisco, 2006).

A variety of interest groups are needed to realise a WLAN that provides services to the public, such as residents, tourists and business visitors. These include infrastructure providers, Internet service providers (ISPs), hardware providers and clearinghouse operators. In general, provision of a WLAN can be characterised either as a top-down approach in which network operators charge access fees, or as a bottom-up approach in which end-users are offered a free access on a noncommercial basis (Rao & Parikh, 2003). Thus, the main relationships are business-to-customer (B2C), business-to-business (B2B), business-to-government (B2G) and customer-to-government (C2G). Publicly provided noncommercial networks are often partly commercial, because their production and development usually requires outsourced services by collaborating partners. “Wireless city networks” are collections of networks under a same brand and they differ fundamentally from single actor networks (e.g., closed company network).

A second important issue of public and open access WLANs is information security and authentication. Commercial services always require an authentication procedure due to the need to charge for the service. From this viewpoint, noncommercial networks are more challenging because from the end user perspective, they can be either open access or ID-required networks. From the technical viewpoint, all connections have an “authentication” in the machine-to-machine interaction (requiring an IP address), but end user information is not included in open access networks.

Public organisations can provide two main elements for end-users: 1) the network access signal and 2) the access device. All other components and their provision are based on B2B or B2C arrangements. However, this is a generalised and spatially noncontextualised description of a WLAN provision. The issue becomes more complex when location-related specifics are included. For example, the physical attributes of the WLAN environment are important, because architecture (building heights and materials) and surface topology influence connection quality and speed.

The third, and perhaps the most problematic, field of WLAN analysis is human-to-computer interaction (see Davies, Cheverst, Friday, & Mitchell, 2002; Dawley & Anthony, 2003; Inkinen, 2006). This refers to user preferences, needs, contents and services of the Internet used via the WLAN connections. These include issues of P2P networking and distribution of copyrighted materials. Misuse of information networks is an identified problem of open access networks. Therefore, in most cases noncommercial freely accessible networks have an authentication system to prevent unwanted network behaviour. This implicates issues of network security and related protocols, for example, Wired Equivalency Privacy (WEP) that encrypts transmitted data. Also other security mechanisms, such as end-to-end encryption and

virtual private networks (VPN) are tools that increase mobile workstation privacy and security.


WIRELESS NETWORKS IN FINLAND

General Overview

Finnish public WLANs can be divided into three categories. First, there are commercial services provided by telephony operators, such as TeliaSonera (HomeRun) and Finnet Group (DNA WLAN). These services are provided on a “hot spot” principle, referring to spatially limited locations within a city space. Commercial hot spots are commonly located in hotels, airports, shopping malls, conference centres, restaurants and other gathering places in which the customer segment is expected to need wireless data transfer. These services have a charge, and depending on the tariff system, access can be obtained for minutes to weeks. Hot spot WLANs are targeted to professionals and they mainly serve the needs of business.

Second, there are WISP (Wireless Internet Service Provider) connections providing Internet access. These services

Figure 1. A characterisation of the public WLAN service provision in Finland

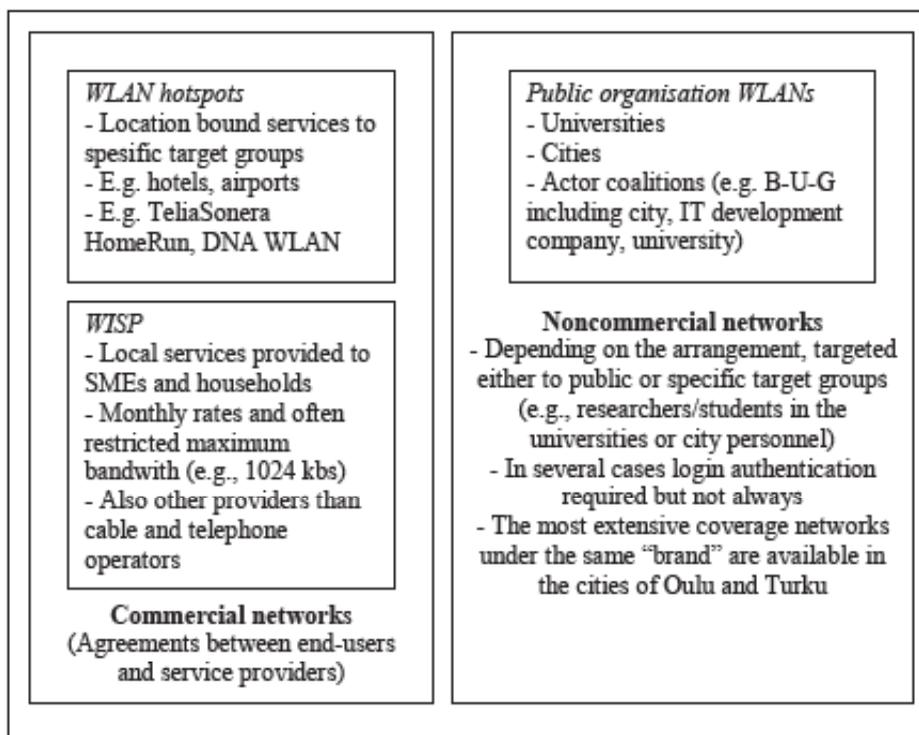

4 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage: www.igi-global.com/chapter/solutions-wireless-city-networks-finland/14102

Related Content

3D Graphics Standardization in MPEG-4

Marius Predaand Françoise Preteux (2009). *Encyclopedia of Information Science and Technology, Second Edition* (pp. 3757-3764).

www.irma-international.org/chapter/graphics-standardization-mpeg/14137

Are Managers Making the Right Choice?: IT Investment for Smart Work

Hyojeong Kimand Chang Juck Suh (2017). *Journal of Cases on Information Technology* (pp. 44-54).

www.irma-international.org/article/are-managers-making-the-right-choice/181073

Decision-Tree Models for Predicting Time Performance in Software-Intensive Projects

Nermin Sökmenand Ferhan Çebi (2017). *International Journal of Information Technology Project Management* (pp. 64-86).

www.irma-international.org/article/decision-tree-models-for-predicting-time-performance-in-software-intensive-projects/177292

An Effective Cybersecurity Training Model to Support an Organizational Awareness Program: The Cybersecurity Awareness TRaining Model (CATRAM). A Case Study in Canada

Regner Sabillon, Jordi Serra-Ruiz, Victor Cavallerand Jeimy J. Cano M. (2019). *Journal of Cases on Information Technology* (pp. 26-39).

www.irma-international.org/article/an-effective-cybersecurity-training-model-to-support-an-organizational-awareness-program/227676

Directed Basic Research in Enterprise Resource Planning (ERP)

S. Parthasarathy (2010). *Information Resources Management: Concepts, Methodologies, Tools and Applications* (pp. 896-909).

www.irma-international.org/chapter/directed-basic-research-enterprise-resource/54523