

Interactive Digital Television

Margherita Pagani

Bocconi University, Italy

BACKGROUND

Interactive television (iTV) can be defined as the result of the process of convergence between television and the new interactive digital technologies (Pagani, 2000a; 2000b; 2003). Interactive television is basically domestic television boosted by interactive functions that are usually supplied through a 'back channel.' The distinctive feature of interactive television is the possibility that the new digital technologies give the user to interact with the content that is on offer (Flew, 2002; Owen, 1999; Pagani, 2000a; 2000b; 2003). The evolution towards interactive television has not an exclusively technological, but also a profound impact on the whole economic system of digital broadcaster—from offer types to consumption modes, and from technological and productive structures to business models.

This article attempts to analyze how the addition of interactivity to television brings fundamental changes to the broadcasting industry. The article first defines interactive transmission systems and classifies the different services offered according to the level of interactivity determined by two fundamental factors such as response time and return channel band. After defining the conceptual framework and the technological dimension of the phenomenon, the study analyzes the new types of interactive services offered. The Interactive Digital Television (iDTV) value chain will be discussed to give an understanding of the different business elements involved.

A DEFINITION OF INTERACTIVITY

The term interactivity is usually taken to mean the chance for interactive communication among subjects (Pagani, 2001, 2003). Technically, interactivity implies the presence of a return channel in the communication system, going from the user to the source of information. The channel is a vehicle for the data bytes that represent the choices or reactions of the user (input). This definition classifies systems according to whether they are diffusive or interactive (Table 1).

- Diffusive systems are those which only have one channel that runs from the information source to the user (this is known as *downstream*);
- Interactive systems have a return channel from the user to the information source (this is known as *upstream*).

There are two fundamental factors determining performance in terms of system interactivity: response time and return channel band.

The more rapidly a system's response time to the user's actions, the greater is the system's interactivity. Systems can thus be classified into:


- *Indirect interactive systems* when the response time generates an appreciable lag from the user's viewpoint;
- *Direct interactive systems* when the response time is either very short (a matter of a few seconds) or is imperceptible (real-time).

The nature of the interaction is determined by the bit-rate that is available in the return channel (Rawolle & Hess, 2000). This can allow for the transfer of simple impulses (yes–no logic), or it can be the vehicle for complex multimedia information (i.e., in the case of video conferencing). From this point of view, systems can be defined as asymmetrically interactive when the flow of information is predominantly downstream. They can also be defined as symmetrical when the flow of information is equally distributed in the two directions (Huffman, 2002).

Based on the classification of transmission systems adopted above, multimedia services can be classified into diffusive (analog or digital) and interactive (Table 2).

Digital television can provide diffusive numerical services and asymmetrical interactive video services. Services as video conferencing, telework, telemedicine, which are within the symmetrical interactive video based upon the above classification, are not part of the digital television offers.

Table 1. The classification of communication systems

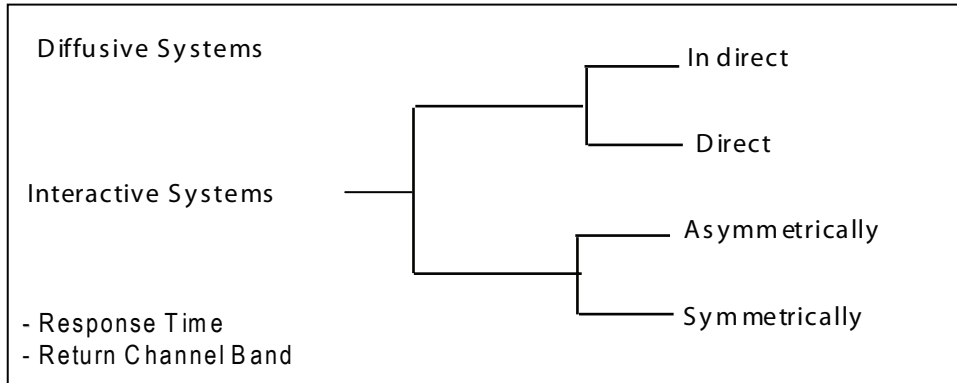

Local Interactivity

An interactive application that is based on local interactivity is commonly indicated as “enhanced TV” application. It does not require a return-path back to the service provider. An example is the broadcaster transmitting a football match using a “multicamera angle” feature, transmitting the video signals from six match cameras simultaneously in adjacent channels. This allows the viewer to watch the match from a succession of different vantage points, personalizing the experience. One or more of the channels can be

broadcast within a time delay, for instant replays. This application involves no signal being sent back to the broadcaster to obtain the extra data. The viewer is simply dipping in and out of that datastream to pick up supplemental information as required.

One-Way Interactivity

One-way interactivity refers to all interactive applications in which the viewer did send back a signal to the service provider via a return path, but there is no ongoing, continuous, two way, real time dialogue and

Table 2. Classes of service (classes not directly relevant to interactive multimedia services are in grey)

| Class of services | Services (examples) |
|--------------------------------|--|
| 1. DIFFUSIVE SERVICES | |
| Analogue transmission | Free channels, Pay TV, Pay per view (PPV) |
| Numerical diffusion | Digital channels Near video on demand (NVOD) |
| 2. INTERACTIVE SERVICES | |
| Asymmetric interactive video | Video on demand (VOD), Music on demand, Home shopping, Video games, Teleteaching Access to data banks |
| Low speed data | Telephony (POTS), data at 14,4; 28,8; 64; 128 Kbit/s |
| Symmetric interactive video | Cooperative work, Telework, Telemedicine, Videoconference, Multi-videoconference |
| High speed data | Virtual reality, distribution of real time applications |

7 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage: www.igi-global.com/chapter/interactive-digital-television/17472

Related Content

Implementation of a Hybrid Classification Method for Diabetes

Dilip Kumar Choubey, Sanchita Paul, Kanchan Bala, Manish Kumar and Uday Pratap Singh (2019). *Intelligent Innovations in Multimedia Data Engineering and Management* (pp. 201-240).

www.irma-international.org/chapter/implementation-of-a-hybrid-classification-method-for-diabetes/211698

3D Music Impact on Autonomic Nervous System Response and Its Potential Mechanism

Yi Qin, Huayu Zhang, Yuni Wang, Mei Mao and Fuguo Chen (2021). *International Journal of Multimedia Data Engineering and Management* (pp. 1-16).

www.irma-international.org/article/3d-music-impact-on-autonomic-nervous-system-response-and-its-potential-mechanism/271430

Generating Window of Sign Languages on ITU J.200-Based Middlewares

Felipe Lacet Silva Ferreira, Tiago Maritan Ugulino de Araújo, Felipe Hermínio Lemos, Gutenberg Pessoa Botelho Neto, José Ivan Bezerra Vilarouca Filho and Guido Lemos de Souza Filho (2012). *International Journal of Multimedia Data Engineering and Management* (pp. 20-40).

www.irma-international.org/article/generating-window-sign-languages-itu/69519

Getting the Big Picture on Small Screens: Quality of Experience in Mobile TV

Hendrik Knoche and M. Angela Sasse (2009). *Multimedia Transcoding in Mobile and Wireless Networks* (pp. 31-46).

www.irma-international.org/chapter/getting-big-picture-small-screens/27194

Construct a Bipartite Signed Network in YouTube

Tianyuan Yu, Liang Bai, Jinlin Guo and Zheng Yang (2015). *International Journal of Multimedia Data Engineering and Management* (pp. 56-77).

www.irma-international.org/article/construct-a-bipartite-signed-network-in-youtube/135517