


To Design a Mammogram Edge Detection Algorithm Using an Artificial Neural Network (ANN)

Alankrita Aggarwal, Panipat Institute of Engineering and Technology, Samalkha, India

 <https://orcid.org/0000-0002-0931-1118>

Deepak Chatha, Panipat Institute of Engineering and Technology, Samalkha, India

ABSTRACT

An artificial neural network (ANN) is used to resolve problems related to complex scenarios and logical thinking. Nowadays, a cause for concern is the mortality rate among women due to cancer. Generally, women to around 45 years old are the most vulnerable to this disease. Early detection is the only hope for the patient to survive, otherwise it may reach an unrecoverable stage. Currently, there are numerous techniques available for the diagnosis of such diseases out of which mammography is the most trustworthy method for detecting early stage cancer. The analysis of these mammogram images is always difficult to analyze due to low contrast and non-uniform background. The mammogram images are scanned, digitized for processing, but that further reduces the contrast between region of interest (ROI) and the background. Furthermore, presence of noise, glands, and muscles leads to background contrast variations. The boundaries of the suspected tumor area are always fuzzy and improper. The aim of this article is to develop a robust edge detection technique which works optimally on mammogram images to segment a tumor area.

KEYWORDS

Artificial Neural Network, Mammogram, Mammography, Neural Network

INTRODUCTION


The flow diagram consists of three major steps i.e. bilateral filtering, entropy multithresholding and artificial neural network (ANN) based edge detection (Sharifi, Fathy, & Mahmoudi, 2002). The acquired image is preprocessed by using bilateral filter to smoothen any spurious pixels present in acquired image. As mammographic images have low contrast and single thresholding Binarization is not inadequate for mammogram images. Therefore, three threshold levels are calculated by using entropy technique for binarization (Heindel, Wige, & Kaup, 2016). This multi threshold entropy binarization method helps to manifest maximum detail out of low contrast breast images. The true edges are filtered out by using Artificial Neural Network which is trained by using 3×3 Binary images. Finally, the output of ANN is edge map of less masses present in mammogram images. The complete details of these steps are described in following subsections. (Joshi, Yadav, & Allwadh, 2016).

The detail flow diagram of proposed method is shown in Figure 1.

DOI: 10.4018/IJDAI.2019010104

Copyright © 2019, IGI Global. Copying or distributing in print or electronic forms without written permission of IGI Global is prohibited.

Figure 1. Flow diagram of proposed algorithm

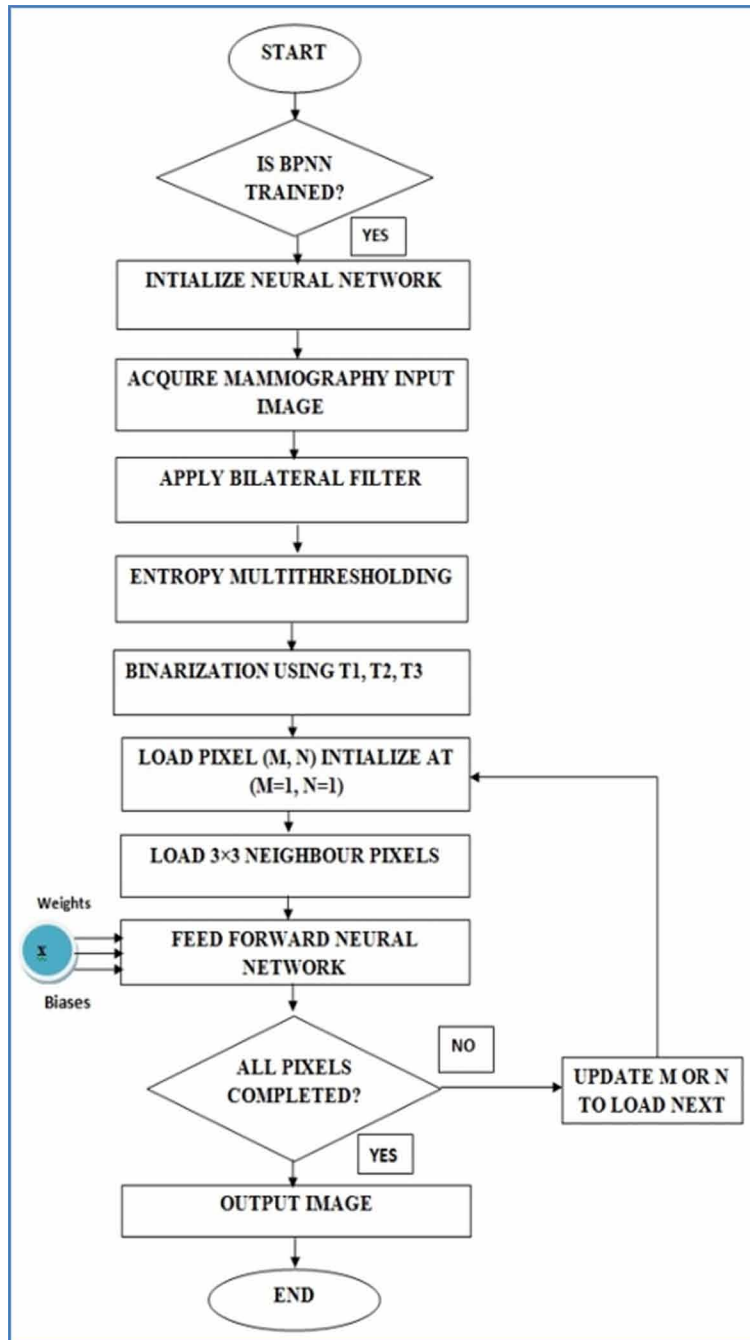

BACK PROPAGATION NEURAL NETWORK (BPNN)

Back propagation neural network (BPNN) is a multi-layer network introduced. It is basically a supervised network use to train the network for edge detection by using the different Training Samples. Training means adjustment of Weights and Biases of Neural Network according to different input and output relation (Chickanosky & Mirchandani, 1998).

8 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage: www.igi-global.com/article/to-design-a-mammogram-edge-detection-algorithm-using-an-artificial-neural-network-ann/248481

Related Content

Interaction of Agent in E-Business: A Look at Different Sources

Jorge A. Romero (2009). *Handbook of Research on Agent-Based Societies: Social and Cultural Interactions* (pp. 60-67).

www.irma-international.org/chapter/interaction-agent-business/19618

Evolution of Agents in a Simple Artificial Market

Hiroshi Sato, Masao Kubo and Akira Namatame (2011). *Multi-Agent Applications with Evolutionary Computation and Biologically Inspired Technologies: Intelligent Techniques for Ubiquity and Optimization* (pp. 118-133).

www.irma-international.org/chapter/evolution-agents-simple-artificial-market/46202

An Agent-Based Model of the Spread of Devil Facial Tumor Disease in an Isolated Population of Tasmanian Devils

Charles E. Knadler (2012). *International Journal of Agent Technologies and Systems* (pp. 1-16).

www.irma-international.org/article/agent-based-model-spread-devil/75446

Agent Feedback Messaging: A Messaging Infrastructure for Distributed Message Delivery

Richard Schilling (2009). *Handbook of Research on Agent-Based Societies: Social and Cultural Interactions* (pp. 84-103).

www.irma-international.org/chapter/agent-feedback-messaging/19620

A Literature Review on Automation Testing Using Selenium+Sikuli

Ashish Lathwal (2019). *International Journal of Distributed Artificial Intelligence* (pp. 35-40).

www.irma-international.org/article/a-literature-review-on-automation-testing-using-seleniumsikuli/250842