

Chapter 1.17

A Survey on Temporal Data Warehousing

Matteo Golfarelli

DEIS – University of Bologna, Italy

Stefano Rizzi

DEIS – University of Bologna, Italy

ABSTRACT

Data warehouses are information repositories specialized in supporting decision making. Since the decisional process typically requires an analysis of historical trends, time and its management acquire a huge importance. In this paper we consider the variety of issues, often grouped under term temporal data warehousing, implied by the need for accurately describing how information changes over time in data warehousing systems. We recognize that, with reference to a three-levels architecture, these issues can be classified into some topics, namely: handling data/schema changes in the data warehouse, handling data/schema changes in the data mart, querying temporal data, and designing temporal data warehouses. After introducing the main concepts and terminology of temporal databases, we separately survey these topics. Finally, we discuss the open research issues

also in connection with their implementation on commercial tools.

INTRODUCTION

At the core of most business intelligence applications, *data warehousing systems* are specialized in supporting decision making. They have been rapidly spreading within the industrial world over the last decade, due to their undeniable contribution to increasing the effectiveness and efficiency of the decisional processes within business and scientific domains. This wide diffusion was supported by remarkable research results aimed at improving querying performance, at refining the quality of data, and at outlining the design process, as well as by the quick advancement of commercial tools.


In the remainder of the paper, for the sake of terminological consistency, we will refer to a classic architecture for data warehousing systems, illustrated in Figure 1, that relies on three levels:

1. The *data sources*, that store the data used for feeding the data warehousing systems. They are mainly corporate operational databases, hosted by either relational or legacy platforms, but in some cases they may also include external web data, flat files, spreadsheet files, etc.
2. The *data warehouse* (also called *reconciled data level*, *operational data store* or *enterprise data warehouse*), a normalized operational database that stores detailed, integrated, clean and consistent data extracted from data sources and properly processed by means of ETL tools.

3. The *data marts*, where data taken from the data warehouse are summarized into relevant information for decision making, in the form of *multidimensional cubes*, to be typically queried by OLAP and reporting front-ends.

Cubes are structured according to the *multidimensional model*, whose key concepts are fact, measure and dimension. A *fact* is a focus of interest for the decisional process; its occurrences correspond to *events* that dynamically occur within the business world. Each event is quantitatively described by a set of numerical *measures*. In the multidimensional model, events are arranged within an n-dimensional space whose axes, called *dimensions* of analysis, define different perspectives for their identification. Dimensions commonly are discrete, alphanumerical attributes

Figure 1. Three-levels architecture for a data warehousing system

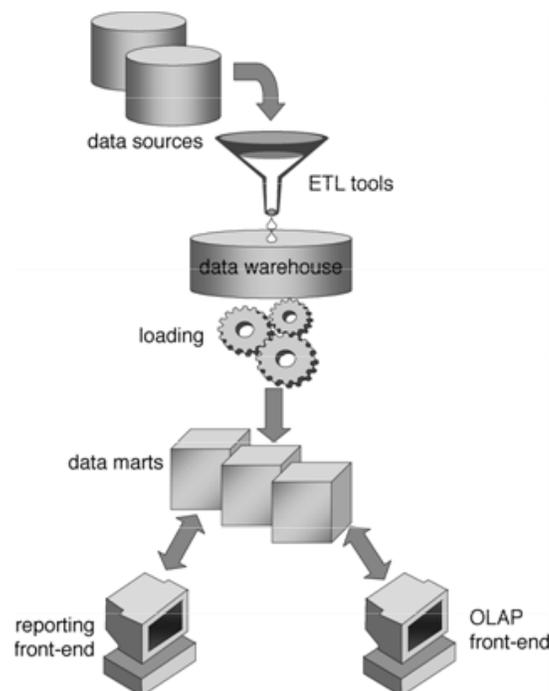

15 more pages are available in the full version of this document, which may be purchased using the "Add to Cart" button on the publisher's webpage:

www.igi-global.com/chapter/survey-temporal-data-warehousing/7914

Related Content

Completion of Parallel app Software User Operation Sequences Based on Temporal Context

Haiyi Liu, Ying Jiang and Yongquan Chen (2023). *Journal of Database Management* (pp. 1-17).

www.irma-international.org/article/completion-of-parallel-app-software-user-operation-sequences-based-on-temporal-context/321196

Predicting Software Abnormal State by using Classification Algorithm

Yongquan Yan and Ping Guo (2016). *Journal of Database Management* (pp. 49-65).

www.irma-international.org/article/predicting-software-abnormal-state-by-using-classification-algorithm/165162

Ontology-Based Semantic Models for Databases

László Kovács, Péter Barabás and Tibor Répási (2009). *Handbook of Research on Innovations in Database Technologies and Applications: Current and Future Trends* (pp. 443-451).

www.irma-international.org/chapter/ontology-based-semantic-models-databases/20729

Physical Modeling of Data Warehouses Using UML Component and Deployment Diagrams: Design and Implementation Issues

Sergio Lujan-Mora and Juan Trujillo (2006). *Journal of Database Management* (pp. 12-42).

www.irma-international.org/article/physical-modeling-data-warehouses-using/3351

Visualization of Predictive Modeling for Big Data Using Various Approaches When There Are Rare Events at Differing Levels

Alan Olinsky, John Thomas Quinn and Phyllis A. Schumacher (2018). *Handbook of Research on Big Data Storage and Visualization Techniques* (pp. 604-631).

www.irma-international.org/chapter/visualization-of-predictive-modeling-for-big-data-using-various-approaches-when-there-are-rare-events-at-differing-levels/198779